

Close-in Reception with CC1101

By Mathias Jensen & Henrik Vatnar

Keywords

- *CC1100E*
- *CC1101*
- *Close-in Reception*
- *Saturation*

1 Introduction

This document describes how the CC1100E and CC1101 can be used in close-range applications. The chips have a saturation limit of approximately -15 dBm at 250 kbps, which might be a challenge for some short-range applications.

Two suggested solutions are presented, the first is a double-transmit scheme and the second is to shift the receivers dynamic range during close-range reception.

Table of Contents

KEYWORDS.....	1
1 INTRODUCTION.....	1
2 ABBREVIATIONS.....	2
3 WORKAROUND 1: DOUBLE TRANSMIT.....	3
3.1 EXAMPLE 1: ONE-WAY SOLUTION	3
3.2 EXAMPLE 2: TWO-WAY SOLUTION	3
4 WORKAROUND 2: CHANGE RECEIVER DYNAMIC RANGE	3
4.1 IMPLEMENTATION	4
4.2 TIMING	5
5 NOTES.....	6
6 GENERAL INFORMATION	7
6.1 DOCUMENT HISTORY.....	7

2 Abbreviations

ACK	Acknowledgement
CS	Carrier Sense
dB	decibel
Kbps	kilo bits per seconds
kHz	kilo Hertz
MBaud	Mega Baud
RSSI	Received Signal Strength Indicator
RX	Receive, Receive Mode

3 Workaround 1: Double Transmit

The work-around is to perform a double transmit for each transmit packet. First, the data is transmitted with typical output power, e.g. +10 dBm, and then repeated with reduced output power, e.g. -30 dBm. This will ensure that either the data transmitted with typical output power will be received at medium to long ranges (the receiver may be saturated if close-in), while the second transmit with reduced output power will be received close-in.

This workaround may or may not be suitable, depending on the application. It may not be suitable e.g. in applications where a single sender transmits to multiple receivers placed at various distances from the sender. For such applications, workaround 2 should be used.

3.1 Example 1: One-way Solution

Assume a sender transmits the same packet 10 times to ensure that at least one packet is received by the receiver. With this workaround the sender transmits the same packet 10 times with typical output power and 10 times with reduced output power. The packets can be sent back-to-back.

This solution will increase the transmit current consumption by approximately 37% (32.4 mA @ +10 dBm; 12.1 mA @ -30 dBm; $(32.4 + 12.1) / 32.4 = 37\%$).

3.2 Example 2: Two-way Solution

The sender transmits the same packet alternatively with typical and reduced output power until an ACK is received. When an ACK is received the sender continues to transmit at that output power until an ACK is not received. If an ACK is not received, the sender retransmits with the same output power a few times before it again transmits alternatively with typical and reduced output power.

Note that the receiver also must transmit the ACK messages with alternating typical and reduced output power. The receiver knows that the ACK was successfully transmitted when the next packet in sequence is received.

This solution will ensure that the sender and receiver are transmitting with an output power adjusted to the each other and thus reduce the power consumption. Data throughput is not significantly affected.

The two-way solution will have more robust communication and lower power consumption.

4 Workaround 2: Change Receiver Dynamic Range

The workaround is to shift the receiver dynamic range, by introducing programmable attenuation in the receiver. This will shift both the saturation level and the sensitivity level upwards. For medium to long range operation, the system must use the original settings with high sensitivity and moderate saturation levels. Table 1 shows how the RX chain attenuation can be programmed:

FIFOTHR.CLOSE_IN_RX[1:0]	Attenuation
00	0 dB
01	6 dB
10	12 dB
11	18 dB

Table 1. Receive Chain Attenuation

Note that the values in Table 1 are typical values.

Design Note DN010

Introducing attenuation in the receiver shifts both the sensitivity and the saturation level as mentioned above. A typical example is Table 2.

FIFOTHR.CLOSE_IN_RX [1:0]	Sensitivity, 250kbps, MSK [dBm]	Saturation, 250kbps, MSK [dBm]
00	-92	-15
11	-74	+3

Table 2. Change in Sensitive and Saturation when using Attenuation in the RX Chain

By using the programmable attenuation function together with the carrier sense (CS) signal, it is possible to implement a simple solution for close range applications.

Note that the RX filter bandwidth cannot be greater than 541.7 kHz for the CS signal to function properly, see section 5.

4.1 Implementation

Sender

No changes are necessary; the sender transmits with typical output power.

Receiver

Below are the steps needed for the receiver:

1. Setup one GDO pin to reflect the CS signal. Example code to setup CS on GDO2:

```
// 0x0E = Carrier sense. High if RSSI level is above threshold.
halSpiWriteReg(CCxxx0_IOCFG2, 0x0E);
```

2. Enter RX mode with no attenuation, i.e. FIFOTHR.CLOSE_IN_RX [1:0] = 00.
3. When the preamble is detected by the radio the CS signal is set. The MCU should be setup such that this triggers an interrupt (polling is not recommended).
4. *Interrupt routine:* The MCU reads the RSSI value and determines if attenuation should be enabled. If the MCU is fast enough, this step can be done within the preamble period so that the packet is successfully received. If a slower MCU is used, either the preamble must be extended (more than 4 bytes) or the packet must be retransmitted. A suitable RSSI threshold is approximately -39 dBm, which is equal to a RSSI register value of 70. Example code for interrupt routine:

```
// Read RSSI and check if RSSI is above -39 dBm (=70)
if ((INT8)halSpiReadReg(CCxxx0_RSSI) > 70){
    // RSSI is above -39 dBm enable attenuation
    halSpiWriteReg(CCxxx0_FIFOTHR, 0x37);
}
// 0x0E = Carrier sense. High if RSSI level is above threshold.
halSpiWriteReg(CCxxx0_IOCFG2, 0x0E);
```

Since the RSSI register represents a 2's complement signed value, it is important to cast the returned value for correct comparison.

- When the packet has been received, or when the transmission is complete, or after a time-out period, the attenuation is disabled to enable reception at medium and long ranges.

```
// Disable attenuation
halSpiWriteReg(CCxxx0_FIFOTHR, 0x07);
```

4.2 Timing

It is important that step 4 or the interrupt routine is executed fast enough if the packet is to be successfully received without the need for retransmissions. This is especially critical when using high bitrates. Four factors influence this timing:

- Preamble length.** A longer preamble puts fewer requirements on the 3 items below.
- CS signal delay.** The CS signal delay is the time it takes for the CS signal to be set after the start of the transmission of the preamble. Table 3 shows the typical maximum delays.

Data Rate [kbps]	Time [μ s]	# of Bits
100	80	8
250	72	18

Table 3. CS Signal Delay

- MCU processing time.** This is the time it takes for the interrupt routine to:
 - Read the RSSI value
 - Decide if RX attenuation is needed
 - If yes, write the new RX attenuation setting.

With a 6 Mbaud SPI interface, each read and write operation requires approximately 3 - 4 μ s. In addition the MCU will need some time to decide if attenuation is needed. Assuming this will take approximately 2 - 4 μ s, total time for this step will be approximately 10 μ s. This is equal to 1 bit period at 100 kbps and 2.5 bit periods at 250 kbps.

- Bit Synchronization and Frequency Offset Compensation.** 16 bits are recommended for this, even though 8 bits are possible if the crystal frequencies are very close.

The preamble needs to be at least as long as the time that is required to execute steps 2, 3, and 4. See Figure 1 for an example.

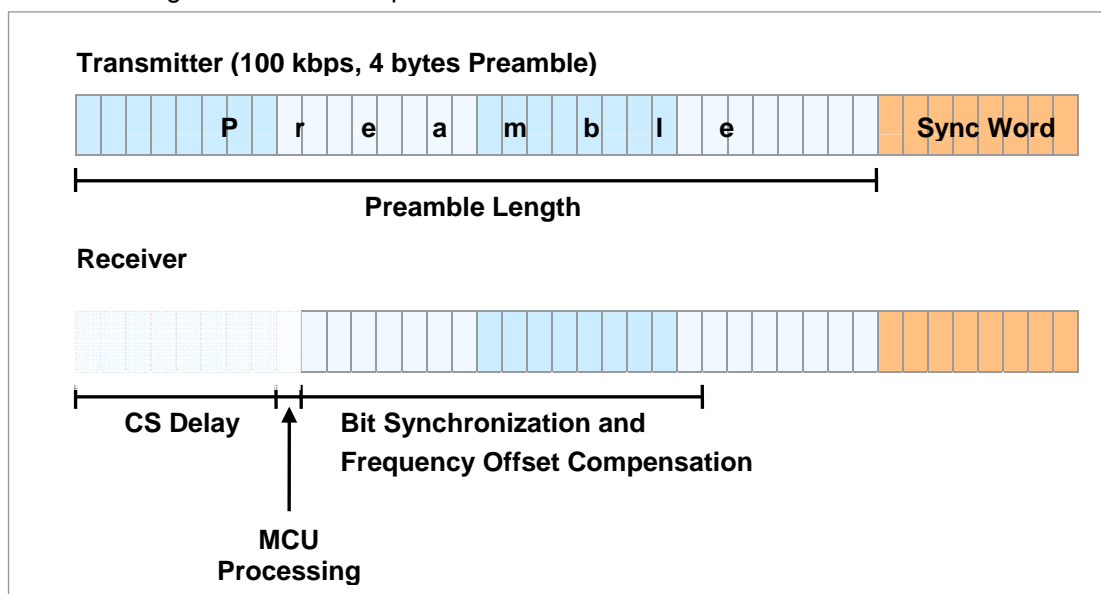


Figure 1. Minimum Preamble Length

5 Notes

CS cannot be used with a larger RX filter bandwidth than 541.7 kHz. Using a larger bandwidth will immediately set CS. This is due to large amounts of noise being received when using a large RX filter bandwidth.

6 General Information

6.1 Document History

Revision	Date	Description/Changes
SWRA147B	2009.07.21	Cosmetic changes
SWRA147A	2009.03.12	Removed logo from header. Added CC1100E
SWRA147	2007.06.29	Initial Release

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated