

## Data Rate Test

Date Completed: \_\_\_\_\_

Performed by: \_\_\_\_\_

### Tested Specifications:

Test #	Engineering Specification	Description	Pass Requirement
T6	ES7	Data rate of system	>40kbps

### Revision History:

Revision	Description	Date
1	Document Created	12/9/2010
2	Document Updated	1/6/2011


### Equipment Needed:





Name of Equipment	Accuracy
2 Communication Boards	-
2 PCs with SmartRF Studio Previously Installed	-
2 CC Debuggers	-
Distance Measurer	1m
Tape	-
Marker	-


**Resources Needed:**

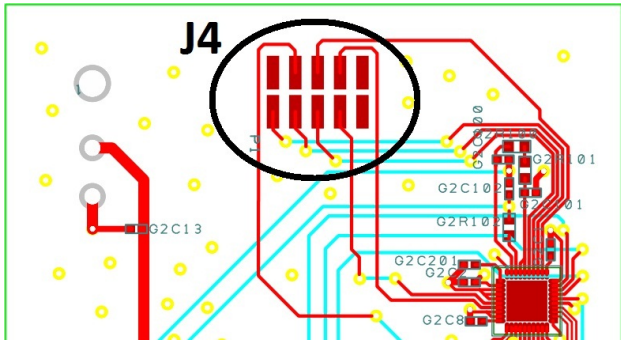Resource	Comment
SmartRF Studio 7	-
Custom Script	The script compares the received data (Hex format exported from SmartRF Studio 7) with the original transmitted data, and calculates the Data rate of the connection.
Gordan Field House Space	Measurement should be performed in Line of Sight.

**Test Procedure:**



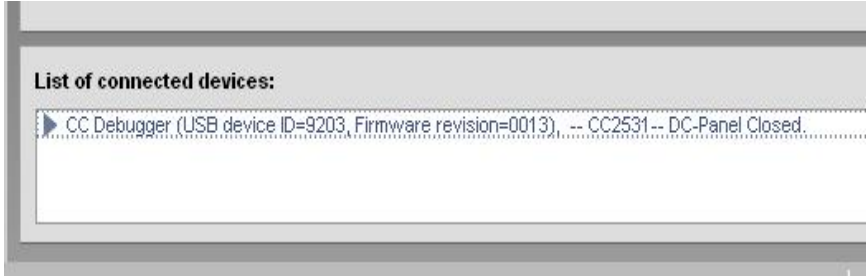


Step Number	Check Off	Procedure
1		Put a distance marker (tape with the corresponding distance written on it) at 100m with respect to a starting marker using a measuring device for accuracy.
2		Place a communication board at the starting marker upon a static free surface at least two feet off the ground. Orientate the antenna vertically.
3		Place a PC by the communication board and turn it on.
4		Connect the CC Debugger to a USB port of the PC using a USB cable.
5		<p>Plug the programming connector from the CC Debugger to J4 on the communication board.</p> 
6		Open SmartRF Studio 7 on the PC (at the starting

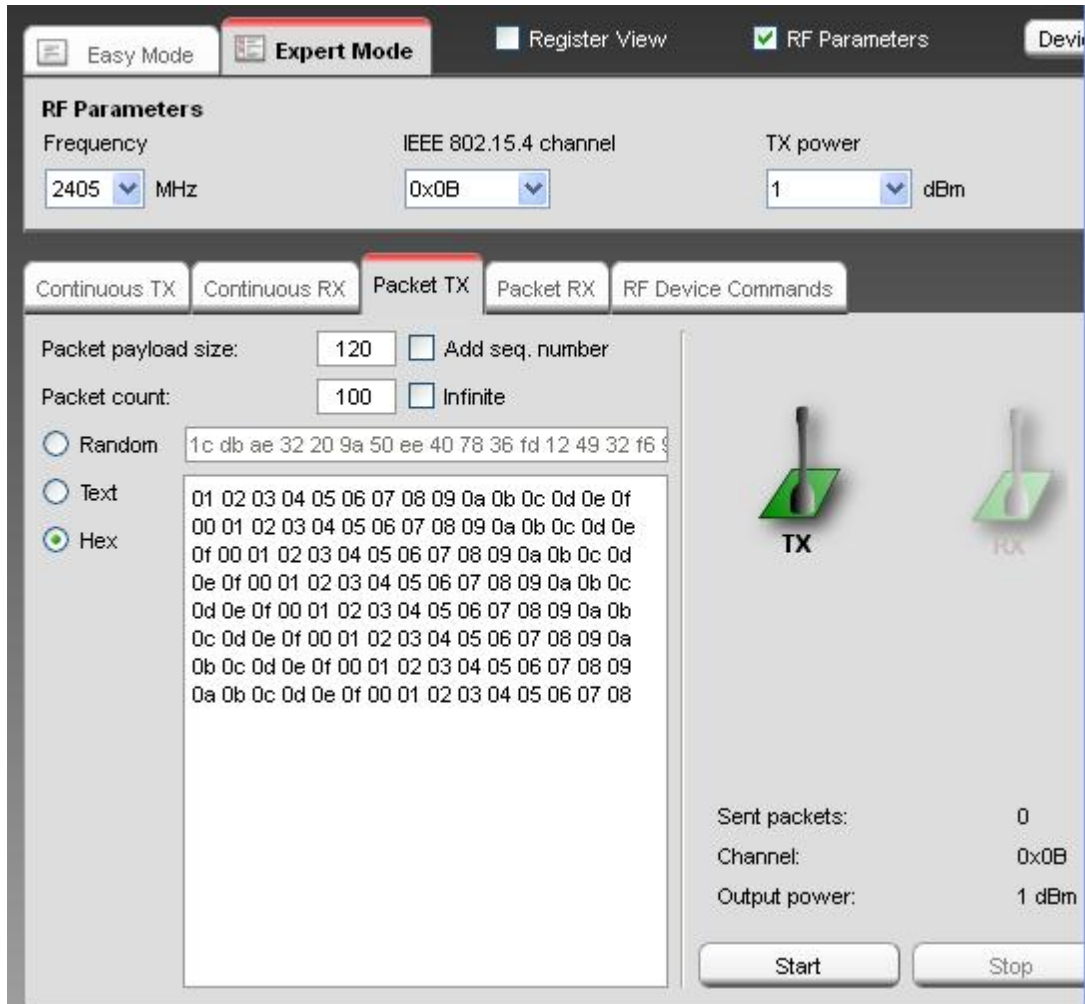


		 <p>marker).</p>
7		<p>Double click on the connected device to open the device control panel.</p> 
8		<p>Click on the Expert Mode on the top of the screen.</p> 
9		<p>Click on Packet Tx on the top of the screen.</p> 
10		<p>Fill in the Fields according to Figure 1.</p>

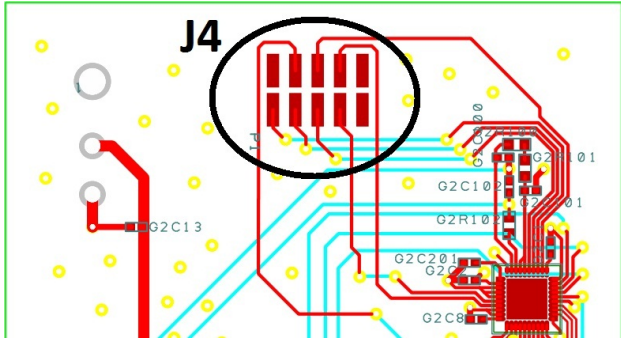

**Figure 1 - Configuration Settings for Transmission**

11		Place a communication board at the 100m marker upon a static free surface at least two feet off the ground. Orientate the antenna vertically.
12		Place a PC by the communication board and turn it on.
13		Connect the CC Debugger to a USB port of the PC using a USB cable.
14		Plug the programming connector from the CC Debugger to J4 on the communication board.

		
15		<p>Open SmartRF Studio 7 on the PC (at the starting marker).</p> 
16		<p>Double click on the connected device to open the device control panel.</p> 
17		<p>Click on the Expert Mode on the top of the screen.</p> 
18		<p>Click on Packet Rx on the top of the screen.</p>
19		<p>Fill in an appropriate name for the test in the field at the bottom of the screen. Record or copy this name.</p> 

20		<p>Click on the start button at the bottom right of the screen on the PC at the 10m marker to start receiving</p>  <p>data.</p>
21		<p>Click the start button at the bottom right of the screen on the PC at the starting marker to start the transmission of</p>  <p>data.</p>
22		<p>Wait until the receive computer has received 100 packets successfully.</p> 
23		<p>Open up the custom script and input the name of the text file for the executed test.</p>
24		<p>Record the calculated Data Rate from the script in the Measured Results table.</p>

**Measured Results Table:**

<b>Variable Name</b>	<b>Recorded Value</b>	<b>Passable Range</b>	<b>Pass/Fail</b>
Data Rate (kbps)		>40kbps	

**Comments and Calculations:**

**Sign off on section completion:** \_\_\_\_\_

**Date of Sign Off:** \_\_\_\_\_